
sentec.

Vital patient data at a glance

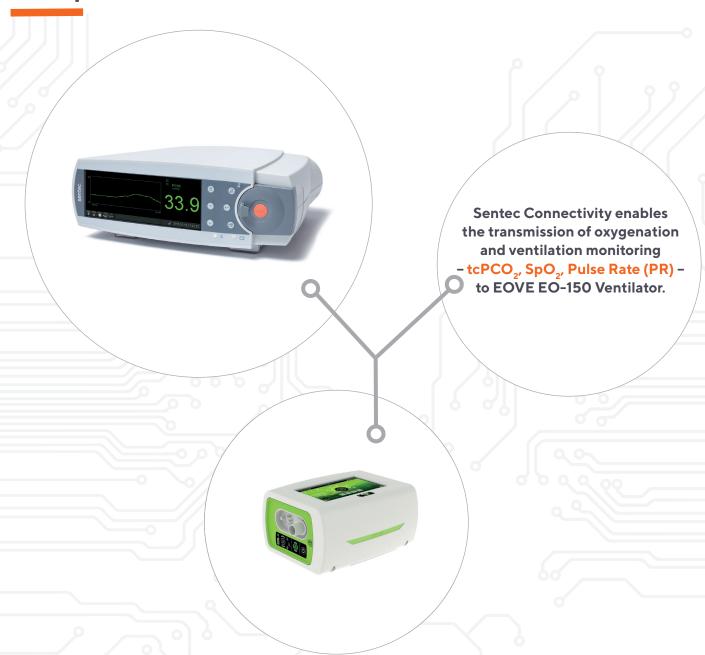

Sentec Connectivity

EOVE EO-150 Ventilator

- Extends the EO-150 Ventilator diagnostic tools by enabling overnight screening with tcPCO₂/SpO₂
- Integrate trends of Sentec's drift corrected tcPCO₂, SpO₂ and Pulse Rate in EOVE Clinical Data Software
- Intuitive user interface and easy setup
- The first solution offering continuous communication between the Sentec Digital Monitor and a ventilator



Sentec Connectivity

EOVE EO-150 Ventilator

Required Components	System Requirements	Description
Sentec Digital Monitor (SDM)	Software version V08.00 to V08.03	Provides noninvasive and continuous real-time monitoring of ventilation and oxygenation
EO-150 Ventilator	User interface version 3.0.0 or higher	Displays and stores tcPCO ₂ , SpO ₂ and Pulse Rate (PR) from SDM Set Low SpO ₂ alarm on EO-150 to enable an alarm upon disconnection with the Sentec Digital Monitor.
Standard Serial (RS232) to USB converter cable (off-the-shelf product)		Connection between SDM and EO-150 Ventilator
EOVE Clinical Data Software	Version v1.5.2 or higher	Displays trends of drift corrected tcPCO ₂ , SpO ₂ and Pulse Rate from SDM

Sentec Connectivity Support Team

Let's connect.

If you need support, please contact your local Sentec representative, send an e-mail to connectivity@sentec.com or consult your EOVE representative.

Please visit **www.sentec.com** for more information.

Your local distributor:



Ringstrasse 39 4106 Therwil Switzerland www.sentec.com



